



SOCOMATE

INTERNATIONAL


# FAAST\_II Phased Array




## FAAST References



OCTG Tube

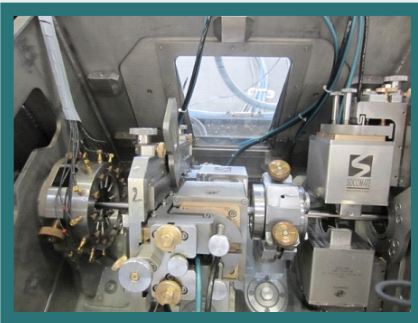

Precision tube with e.Rota and FAAST

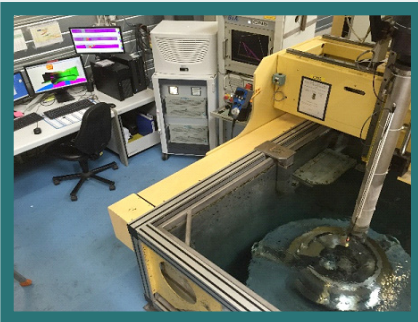

Aircraft Components



Railway on-track inspection

\*For more details, please contact us on [www.socomate.com](http://www.socomate.com)



Patented Phased Array technology FAAST (ISO 18563-1)

## Main Features

- ===== Up to 64 full parallel channel per rack (4x16; 2x32; 1x64).
- ===== All channels driven with the same standard software, API and SDK, allowing numerous arrangements :
  - 1 Rack: 4x16, 2x32, 1x64
  - 2 Racks: 8x16, 4x32, 2x64, 1x128
  - 4 Racks: 16x16, 8x32, 4x64, 2x128, 1x256
  - Ability to drive more racks (ie: Channels) on request
- ===== Transmission of multiple oriented and/or focused beams in one single shot through all type of multi-element array probes. Linear, Bi-linear\* and matrix.
- ===== Real time data processing and multi A-Scan display.
- ===== Linear & sectorial scanning with single or multiple beams.
- ===== Compatible with « active\* » type probes embedding electronics: pulser, preamplifier, multiplexer.
- ===== I/O: 8 analog & 9 digital outputs per card – Up to 16 cards per rack.
- ===== Gigabit data transfer: 500Mb/s.
- ===== Software development kit included with source code.



Zone Industrielle • 8, rue des Abbesses • 77580 CRECY LA CHAPELLE • FRANCE

Phone : +33 1 6463 8109 • Fax : +33 1 6463 6021

[www.socomate.com](http://www.socomate.com) • email : [contact@socomate.fr](mailto:contact@socomate.fr)

S.A.S au capital de 200.000,-€ - RC Meaux 92B17 - N° Siret 383 926 490 00020 - Code APE 2651B - TVA intracommunautaire FR27 383 926 490





SOCOMATE

INTERNATIONAL

# MAIN SPECIFICATIONS



Advanced NDT Limited  
Orchard House, Orchard Close  
Severn Stoke, Worcester  
WR8 9JJ, England  
Tel: 44 (0) 1905 371 460  
Fax: 44 (0) 1905 371 477

Web: [www.advanced-ndt.co.uk](http://www.advanced-ndt.co.uk)  
Email: [sales@advanced-ndt.co.uk](mailto:sales@advanced-ndt.co.uk)

<b>HARDWARE</b>	Industrial PC rack 19" - 6U. Including: Specific power supply for FFAST_II linear transmitters, FRB connector for multi-element probes and up to 16 UT-PCI cards (Ref: USPCFAAST_II). Consumption per 64CH rack: 1 kVA. Operating temperature: 0° to 40°C - (32° to 104°F)
<b>LINEAR TRANSMITTERS</b>	Single shot multi-directional transmitter and arbitrary waveform generator per channel. Delay resolution: up to 1 ns. Probe frequency range: 0.5 - 15MHz. Max amplitude: 80Vpp (50 Ohms). Max PRF: 20kHz.
<b>RECEIVERS</b>	Pass-band: 0.5 - 17 MHz (-3 dB). Gain: 0 to 70 dB. DAC dynamic: 70 dB. DAC slope: ±70 dB/ 0.1 µs Max.
<b>GATES</b>	Gate IF (yellow). Gate 1 (red) & Gate 2 (blue); All gates fully independent. Start: 80 ns to 655 µs/ 20 ns step. Width: 20 ns to 655 µs/ 20 ns step. Level: 10% to 90%/ 1% step. Double threshold: Gates 1 & 2. Triggers: Not active/ Initial pulse/ Interface/ Artificial, on Gates 1 & 2, and Gate-to-Gate on Gate 2. Back-echo tracking on Gate 1.
<b>FLAW IN-LINE</b>	Flaw alarm: Positive/ Negative. Noise suppression: 0 to 250 violations. Flaw mode: Max. or first echo peak amplitude on Gates 1 & 2. Amplitude resolution: 1% FSH.
<b>TOF/ Wall Thickness In-line</b>	Alarms: Min. & Max. Noise suppression : 0 to 30 violations. Mode: First echo on Gate IF and Max. or first echo on Gates 1 & 2. Origins: Peak, flank, zero crossing. Gating mode: HW+, HW-, FW & RF. WT Data process(DSP): Upper & lower limits, Max deviation, filtering, averaging, etc...
<b>A-SCAN DISPLAY</b>	Mode: HW+, HW-, FW & RF. Gates: Yellow (IF), Red (G1) & Blue (G2). DAC Curve: 0% to 70% FSH (0-70dB). Delay: 0 to 655 µs/ 20 ns step. Range: 1 µs to 1.3 ms/ 20 ns step. Trigger: Initial pulse/ Gate 1 Start/ Gate 2 Start/ Gate 1 Trigger/ Gate 2 Trigger. Displayed peak: Snapshot or Max. peak. Velocity: Interface and material. A-Scan length: 100 to 512 points. Acquisition mode: Free running or external. Angle beam trigonometry: Distance & depth. Units: µs/ mm/ inch/ composite Ply resitulation. Moving averaging: on 1/ 2/ 4/ 8/ 16 A-Scan.
<b>DATA PROCESSING</b>	Digitizer per channel: 14 bits. Delay resolution: Up to 5 ns. Processing and display: Real time multi-directional A-Scan.
<b>DATA TRANSFER</b>	PCI bus master mode data transfer to the DLL. Real time A, B & C-Scan data acquisition at 500Mb/s via gigabit ethernet.
<b>SOFTWARE &amp; SDK</b>	DSPs & FPGAs: Allowing real time stand alone running (Socomate property). Standard API (LabVIEW): USPC.exe + sources. API tutorial software: Help!. Multiple card control: Up to 64 via Ethernet. Drivers for Windows O.S.(x32): XP/ VISTA/ 7...and over. DLL with Help! tutorial software. Active X control with Help!. •LabVIEW demo acquisition software with *.exe + sources. •VB & VC samples with *.exe + sources.
<b>FAAST SOFTWARE TOOLS:</b>	3D display of material, multi-element probe, water gap and oriented reflector. Delay laws automatic calculation. Importation of delay laws calculated with external software tools. Downloading of arbitrary wave forms. Multiple A-Scan representation with one A-Scan per delay law. Automatic balancing of all elements. Multi-element virtual probes calibration. Optimum law determination. Optimum mechanical positioning of PA probe in X, Y, Z. Multiple beams in parallel and/or sequential.

## STANDARDS & APPROVALS

Phased Array: ISO 18563-1

Socomate International maintains the right to modify the specification of their equipments, at any time and in whatever manner, in order to improve their performances.

Zone Industrielle • 8, rue des Abbesses • 77580 CRECY LA CHAPELLE • FRANCE

Phone : +33 1 6463 8109 • Fax : +33 1 6463 6021

www.socomate.com • email : contact@socomate.fr

S.A.S au capital de 200.000,-€ - RC Meaux 92B17 - N° Siret 383 926 490 00020 - Code APE 2651B - TVA intracommunautaire FR27 383 926 490

