

Labino UVG 2.0 Series

UV LED Inspection Lights



ROLLS-ROYCE RRES 90061 COMPLIANT MODEL



PENETRANT RESISTANT • CURRENT REGULATOR • HOMOGENEOUS BEAM • IP68 WATERPROOF

The Labino UVG 2.0 Series are penetrant resistant and have Ingress Protection 68 (IP68 Waterproof). These Small, light and powerful UV LED torches are a convenient tool for quick inspections. The beam profile is probably the largest and smoothest from any torch type UV light on the market today. Depending on the model, the beam diameter is 3 - 5 inches / 8 - 12.5cm.

Please note that **ALL** Labino lights are equipped with an output regulator (auto-shut off).

The Labino UVG 2.0 Series carry a two year (RTB) manufacturers warranty.

Available only as a KIT which includes:

- 1 x UVG 2.0 Series UV LED Torch *(depending on model chosen)*
- 1 x Charger
- 1 x Car Charger
- 2 x Batteries *(1 required to operate and 1 spare)*
- 1 x Belt Holster
- 1 x Rubber Bumper
- 1 x UV Blocking Glasses
- 1 x Hard Carrying Case
- 1 x Manufacturers Test Report *(to the relevant standard depending on model)*



Advanced NDT Limited
Unit 4 Elgar Business Centre
Moseley Road, Hallow
Worcester WR2 6NJ

Prices & Specifications Subject To Change Without Notice.

E & O.E

Registered in England & Wales. Company No: 05957975

Tel: 44 (0)1905 371 460 - Web: www.advanced-ndt.co.uk - Email: sales@advanced-ndt.co.uk

Labino UVG 2.0 Series

UV LED Inspection Lights



UVG3 2.0 Series (for NDT)

UVG3 2.0 Floodlight (L136)

This UV LED torch has an intensity at the centre of $\approx 4,000 \mu\text{w}/\text{cm}^2$, generating a beam profile of approximately 5 inches / 12.7 cm, and is in compliance with ASTM E3022-18, Rolls-Royce RRES 90061, Airbus AITM6-1001, The Boeing Company, USAF and Pratt & Whitney requirements. The battery life for the UVG3 2.0 Floodlight (L136) is **4 hours**. This is ideal for Aerospace related users that need to comply with Nadcap related checklists and PRIMES requirements. The UVG3 2.0 Floodlight is the torch with the largest beam size in the world and the only one that is in compliance with Rolls-Royce RRES 90061, making it the most compliant torch in the world.

UVG3 2.0 Midlight (L135)

This UV LED torch has an intensity at the centre of $\approx 9,000 \mu\text{w}/\text{cm}^2$, generating a beam profile of approximately 3.8 inches / 9.6 cm, and is in compliance with ASTM E3022-18, USAF and Pratt & Whitney requirements. The battery life for the UVG3 2.0 Midlight (L135) is **8 hours**. This UV Light is ideal for Oil & Gas, general industry, select aerospace users with higher intensity limits such as Pratt & Whitney and military related users.

UVG3 2.0 Spotlight (L134)

This UV LED torch has an intensity at the centre of $\approx 90,000 \mu\text{w}/\text{cm}^2$ (it is correct!) generating a beam profile of approximately 3 inches / 7.6 cm, and is in compliance with ASTM E3022-18 requirements. The battery life for the UVG3 2.0 Spotlight (L134) is **4 hours**. This high intensity UV Light is ideal for Oil & Gas and pipeline related users.

	UVG3 2.0 SPOTLIGHT	UVG3 2.0 MIDLIGHT	UVG3 2.0 FLOODLIGHT
Part No:	L134	L135	L136
Irradiance:	$\approx 90,000 \mu\text{w}/\text{cm}^2$	$\approx 9,000 \mu\text{w}/\text{cm}^2$	$\approx 4,000 \mu\text{w}/\text{cm}^2$
Beam Diameter: > $1,000 \mu\text{w}/\text{cm}^2$:	3 inches / 7.6 cm	3.8 inches / 9.6 cm	5 inches / 12.7 cm
Battery Running Time: <small>(per battery, continuous operation)</small>	4 Hours	8 Hours	4 Hours
Complies With:	- ASTM E3022-2018 - ISO 3059-12	- ASTM E3022-2018 - ISO 3059-12	- ASTM E3022-2018 - ISO 3059-12 - Rolls-Royce RRES 90061

Labino UVG 2.0 Series

UV LED Inspection Lights



UVG2 2.0 Series (for Forensics, Clean Room and Other Applications)

UVG2 2.0 Spotlight (L132)

This UV LED torch has an intensity at the centre of $\approx 100,000 \mu\text{w}/\text{cm}^2$.

The battery life for the UVG2 2.0 Spotlight (L132) is **4 hours**.



UVG2 2.0 Midlight (L133)

This UV LED torch has an intensity at the centre of $\approx 18,000 \mu\text{w}/\text{cm}^2$.

The battery life for the UVG2 2.0 Midlight (L133) is **4 hours**.

	UVG2 2.0 SPOTLIGHT	UVG2 2.0 MIDLIGHT
Part No:	L132	L133
Irradiance:	$\approx 90,000 \mu\text{w}/\text{cm}^2$	$\approx 18,000 \mu\text{w}/\text{cm}^2$
Battery Running Time: <small>(per battery, continuous operation)</small>	4 Hours	4 Hours

Accessories




A600

Tripod Stand



A532

UVG Variable Gooseneck Arm

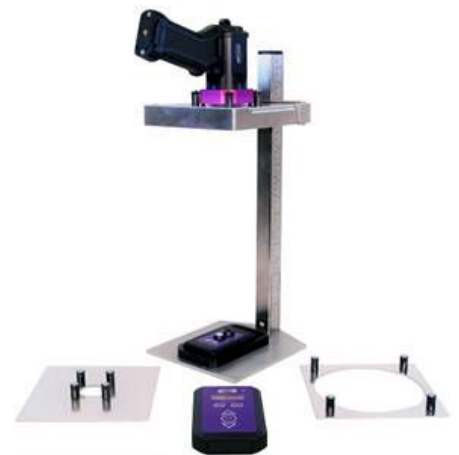

A542

Olympus Measurement Stand

Advanced NDT Limited
Unit 4 Elgar Business Centre
Moseley Road, Hallow
Worcester WR2 6NJ

Prices & Specifications Subject To Change Without Notice.

E & O.E

Registered in England & Wales. Company No: 05957975

Tel: 44 (0)1905 371 460 - Web: www.advanced-ndt.co.uk - Email: sales@advanced-ndt.co.uk